

# PRV

PATENT- OCH REGISTRERINGSVERKET  
Patentavdelningen

10/508991  
Rec'd PCT/PTO 27 SEP 2004  
PCT/ SE 03 / 0 0 4 6 6

REC'D 01 APR 2003

WIPO PCT

## Intyg Certificate

Härmed intygas att bifogade kopior överensstämmer med de handlingar som ursprungligen ingivits till Patent- och registreringsverket i nedannämnda ansökan.

This is to certify that the annexed is a true copy of the documents as originally filed with the Patent- and Registration Office in connection with the following patent application.



(71) Sökande Telefonaktiebolaget L M Ericsson (publ), Stockholm  
Applicant (s) SE

(21) Patentansökningsnummer 0200953-8  
Patent application number

(86) Ingivningsdatum 2002-03-27  
Date of filing

RA 16 11 6

Stockholm, 2003-03-25

För Patent- och registreringsverket  
For the Patent- and Registration Office

*Lina Oljeqvist*

Lina Oljeqvist

Avgift  
Fee

**PRIORITY  
DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

A METHOD AND APPARATUS FOR EXCHANGING DATA IN A MOBILE  
NETWORK.

TECHNICAL FIELD

5           The present invention relates generally to a  
method and apparatus for exchanging potentially sensitive  
user-specific data from a mobile network to a service  
application of an external service provider. In particular,  
the invention is concerned with controlling and facilitating  
10 the process of providing such data.

BACKGROUND OF THE INVENTION AND PRIOR ART

Mobile phones have so far been used mostly for  
making voice calls and for communicating short text  
15 messages, such as SMS (Short Message Service) messages.  
Further, Internet browsing has rapidly become very popular  
and in recent years, the wireless domain and the Internet  
are converging. Mobile terminals are now available, having  
functionality for connecting to the Internet over a wireless  
20 access network to obtain information and services from  
servers located throughout the world.

Today, work is in progress for developing a  
multitude of new mobile services, which will be possible to  
employ in particular as new technology for mobile  
25 communication is introduced, providing greater network  
capacity and higher transmission bitrates. By way of  
example, GPRS (General Packet Radio Service) and WCDMA  
(Wideband Code Division Multiple Access) networks are  
currently emerging for enabling wireless data services  
30 requiring a wide range of data rates. The contents of the  
new services may include text, images, voice, audio files  
and video files in various different formats and

combinations. More sophisticated mobile terminals are also becoming available on the market equipped with functions to match these new services.

In particular, mobile instant messaging and  
5 presence services are rapidly becoming popular. Instant  
messaging is known from the world of fixed desktops,  
including message status reporting and various group and  
contact list features. Presence services involve information  
on the location of mobile terminals, and enable users to  
10 receive messages according to their profile and  
availability. A user profile can be personal and may be  
defined by preferences, interests and hobbies, as well as  
more temporary factors, such as user availability and  
current moods. Messages and content services can also be  
15 delivered depending on present location, availability and  
the capabilities of the user's mobile terminal.

A mobile network providing wireless access to  
mobile terminals typically comprises a plurality of base  
stations being connected together by means of switching  
20 nodes such as Base Station Controllers (BSC) and/or Mobile  
Switching Centres (MSC). Each base station provides radio  
coverage over an area known as a cell, for communication  
over radio channels with mobile terminals located in the  
cell. The mobile network further comprises a multitude of  
25 components or nodes for handling traffic and various  
services for terminals, such as, e.g., a user management  
node, a billing centre, a subscription management node and a  
mobile positioning service (MPS) node. Such mobile networks  
are sometimes referred to as "Public Land Mobile Networks"  
30 (PLMNs).

In order to provide wireless access and specific  
services to users of the mobile terminals, the mobile

network stores user-specific data defining user profiles and/or subscription parameters, e.g., as exemplified above. Thereby, the mobile network can adapt and customise its services to each user, based on the stored user data.

5 Further, many services and applications are provided from so-called third party service providers outside the mobile network, which will be referred to as "external providers" for short in this description. The external providers may communicate with mobile terminals over a backbone network,  
10 such as the Internet, a PSTN (Public Switched Telephony Network) or any type of wireless network, and the mobile network or PLMN to which the intended terminal is currently connected.

External providers may thus activate service  
15 applications for providing specific services to mobile terminals, typically upon request from a terminal. A service application may also be triggered without a preceding terminal request, such as through a "push" mechanism as used for example in the context of WAP (Wireless Application  
20 Protocol) telephony.

Examples of service applications are mail programs, chat programs, content services providing news, weather information or stock quotes, and entertainment services for jokes, games or the like. Such applications often require  
25 access to certain user data stored in the mobile network, for enabling adaptation to specific users. In that case, an external provider requests that such data be retrieved and given from the mobile network. When the external provider has obtained the necessary information on the user,  
30 application data can be communicated with the mobile terminal using the mobile network as a transparent "pipeline".

User data stored in a mobile network is available to, and can be freely accessed by, components and nodes within the mobile network, since these are controlled by the mobile network owning the user data. However, difficulties may arise with respect to privacy when an external provider requires access to certain user data in the mobile network in order to provide a service to one or more mobile terminals. It is then highly desirable to ensure that the external provider is authorised to access the requested user data before the data is delivered, and to protect sensitive user information from unauthorised access. It is also desirable to control the exchange of such data in a simple and effective way.

The Parlay 2.1 and 3.0 specifications describe a proposed solution for providing a standardised interface to mobile networks for external service providers. However, the solution does not protect user privacy and is highly complex. It is thus a problem to exchange user data to external service providers in a simple way which protects user privacy.

#### SUMMARY OF THE INVENTION

The object of the present invention is to reduce or eliminate the problems outlined above. This object and others are obtained by providing a method and apparatus for exchanging user-specific data from a mobile network to a service application of an external service provider, wherein certain user data is needed by the application for providing a requested service to a mobile user. A unique Application User Identification (AUID) code is generated and assigned to a combination of the mobile user and the application. The assigned AUID code is then sent to the application. A

request for the needed user data is received from the application together with an AUID code. It is then determined whether the application is allowed to retrieve the requested user data. If so, the requested user data is  
 5 retrieved based on the received AUID code, and is sent to the application. On the other hand, an error message may be sent if it is determined that the application is not allowed to retrieve the requested user data.

The inventive procedure may be implemented in a  
 10 single data control server having means for performing the procedure. User data can then be efficiently controlled and communicated between a mobile network and service applications. The data control server may include a permission table specifying the types of user data that each  
 15 service application is allowed to receive from the mobile network. The data control server may further include a translation table for storing the AUID code together with a mobile user identity and an application identity. The data control server may further include a translator for  
 20 translating AUID codes into mobile user identities and vice versa by checking the translation table.

The data control server may further include code generating means being capable of generating new AUID codes by dividing the decimal representation of a non-periodic  
 25 irrational number into blocks of a certain length, wherein each block may be used as an AUID code.

The inventive procedure may further be executed by means of a computer program comprising a software code being adapted to perform the method in a data control server.

# BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will now be described in more detail and with reference to the accompanying drawings, in which:

- 5 - Fig. 1 is a schematic view of a simplified communication scenario for exchanging user data to an external provider or application.
- Fig. 2 is a logical block diagram of an exemplary data control server.
- 10 - Fig's 3 and 4 are signalling diagrams for two exemplary communication procedures.
- Fig. 5 is a flow chart illustrating the steps executed in a method for exchanging user data according to one aspect of the invention.

15

## DESCRIPTION OF PREFERRED EMBODIMENTS

A simplified communication scenario is illustrated in Fig. 1, where user data can be exchanged according to the present invention to a service application of an external provider. A mobile terminal 100 operated by a mobile user is  
20 connected to a base station 102 of a mobile network 104 by means of a radio air interface. The mobile network 104 uses standardised communication protocols, such as any of those defined for GSM, TDMA, GPRS, UMTS, etc, for transmission of  
25 speech and data over the air interface as well as within the network. TCP/IP is also commonly used within mobile networks.

A gateway 106 in the mobile network 104, provides connection for mobile terminals to external providers 108  
30 being connected to a backbone network 110, such as the Internet. The gateway 106 may act as a service portal to mobile terminals for connection to specific external

providers. Furthermore, each external provider 108 comprises one or more service applications for executing specific services. In Fig. 1, three service applications 108A1-3 are shown as logical entities at the external provider 108A.

5 Various mobile services are available from external providers 108 by connecting to servers of the external providers, where the services reside typically as computer programs and data files. An external provider may have one or more physical server entities or a server system for  
10 executing any number of service applications. A physical server entity may also be shared by plural external providers. Services may also be provided by multiple external providers. In the following description, the term "external provider" represents any combination of physical  
15 server entities providing a single access point in the perspective of mobile terminals.

The mobile network 104 further comprises a user data base 112 in which user-specific data is stored for mobile users being registered in the mobile network 104. For  
20 example, the stored user data may be related to more or less static factors such as capabilities of the user's mobile terminal and predefined QoS (Quality of Service) parameters, e.g., depending on a subscription, as well as preferences and interests as specified by the user. User data may also  
25 be stored concerning more dynamic factors, such as current user availability and moods and the present location of the terminal. Furthermore, the user data base 112 may also hold certain user data which is stored temporarily for visiting users not belonging to the mobile network 104.

30 When an external provider shall provide a specific service to a mobile user, an application of the service may require specific user data in order to be executed. The user



data is therefore requested from the user data base 112 by the application. However, requested user data may contain information on the user which is private and/or secret and should not be exchanged to anyone requesting the information without control. It is thus desirable to protect the privacy or anonymity of users. The present invention provides a simple and reliable solution for obtaining such control of data exchange.

For this purpose, the mobile network 104 comprises a data control server 114 acting as an interface towards the external providers 108 and their applications, for handling requests for specific user data in the mobile network 104. The data control server 114 controls the exchange of user data and is preferably the only point of contact for making such requests by the external providers 108.

An exemplary procedure for exchanging user data will now be described with reference to Fig. 1. When a user of the mobile terminal 100 wants to make use of one or more mobile services, a suitable command is entered into the mobile terminal 100 by the user. In response to the entered command, the mobile terminal 100 sends a service request to the gateway 106, which acts as a portal for obtaining the service. The gateway 106 then forwards the service request to the data control server 114 which recognises in this case that the user has not accessed this particular service before.

The data control server 114 then generates a unique Application User Identification (AUID) code representing the combination of a specific user and a specific service application corresponding to the requested service. The AUID code is stored together with a mobile user identity such as an MSISDN (Mobile Subscriber ISDN number) used in GSM

Thus, a list of AUID codes for different service applications may be stored in the mobile network 104 for each user. Next, the data control server 114 sends the service request and the generated AUID code over the backbone network 110 to a service application 108A1 corresponding to the requested service.

10           After receiving the service request, the service  
application 108A1 may recognise that certain user-specific  
data is needed for providing the requested service. For  
example, such user data may be needed for adapting the  
service according to user preferences and/or terminal  
15 capabilities. In that case, the service application 108A1  
sends a request for the needed user data to the data control  
server 114 of the mobile network 104. The received AUID code  
is also included in the data request.

The data control server 114 then determines whether this particular application 108A1 is authorised to receive the requested user data, which will be described in more detail later, and may retrieve the data from the user data base 112 and send it to the application accordingly. Alternatively, the service application 108A1 may not need any user data from the user data base 112 for the first service request from the mobile user. The service can then be executed without requesting user data from the mobile network 104.

The AUID code has now been stored in the mobile  
30 network 104 and is also known to the corresponding service  
application 108A1 as being stored locally by the application  
108A1 together with any available user data. Hence, the AUID

code can be used hereafter upon any subsequent access of the user to the same service. In other words, the data control server 114 may pass the AUID code with a new service request from the user on a later occasion to the service application 5 108A1, which then can attribute the previously received user data to the service, if it was locally stored.

The service application 108A1 can also send a request to the data control server 114 for further user data including the AUID code, such as "where is the user 10 currently located having AUID xxx?". The data control server 114 can then obtain the corresponding mobile user identity from the stored AUID code list for retrieving the requested information from the user database 112. The server 114 may then decide whether to grant this request or not, depending 15 on whether the application is authorised to receive the requested type of data, and further depending on, e.g., stored user preferences.

Fig. 2 is a logical block diagram of an embodiment of the data control server 114 shown in Fig. 1. The data 20 control server 114 comprises a mobile network interface 200 for communication with the mobile network 104, and an external provider interface 202 for communication with service applications in external providers 108, such as the service application 108A1. A central logic unit 204 is 25 connected to the interfaces 200, 202 for executing the process described below. The logic unit 204 is further connected to an AUID code generator 206, a translator 208 and a permission table 210. The translator 208 includes a translation table 212.

30 The mobile network interface 200 is configured to receive service requests from mobile users and may retrieve user data from the user data base 112, e.g. using a

communication protocol normally used in the mobile network 104. The external provider interface 202 is configured to receive requests for user data from service applications and may respond with either the requested data or an appropriate error message.

The AUID code generator 206 is configured to generate new unique AUID codes using one or more suitable algorithms, ensuring that a new code has not been used before. It is also important that the generated codes cannot be derived and reproduced by any unauthorised party. A code should therefore be sufficiently long and not have any regular pattern. For example, algorithms may be used which are previously known in pseudo-random number generators offered in most programming languages, such as Java and C++.

It is then common programming practice to use current time as seed for the generator to avoid any regularity.

It is also possible to generate new AUID codes by using a non-obvious irrational number, such as the square root of 57,20938763 or the like, for which the decimal representation is non-periodic. The decimal representation can be divided into blocks of a certain length, such as 50 digits. Each block is then most likely unique and may be used as an AUID code.

The translator 208 containing the translation table 212 is configured to translate AUID codes into mobile user identities and vice versa. The table 212 comprises a list of AUID codes for different user/application combinations, where the users are preferably specified by corresponding identities as being valid in the mobile network 104. An exemplary translation table 212 is shown below:

AUID	Mobile user ID	Application
XXX	+46 111 222	A1
YYY	+46 111 222	A2
ZZZ	+46 333 444	A1
VVV	+46 333 444	A2

It should be noted that each user may have several AUID codes, one for each application it has accessed.

The permission table 210 specifies the types of user data that each service application is allowed to receive from the mobile network. This table is checked before granting a user data request from an application. An exemplary permission table 210 is shown below:

Application	Allowed user data
A1	Current location.
A2	Current location, prepaid account status.
A3	Prepaid account status.
A4	Current location, current mood.

10

A permission table 210 may be maintained for a specific user or group of users, or may be valid for all subscribers belonging to the mobile network 104. The table content may further have been negotiated with the external provider controlling each application. There may also be a minimum set of permissions that is automatically allowed to all service applications, such as for mobile terminal capabilities and subscription-based QoS parameters.

15

Fig's 3 and 4 illustrate signalling diagrams for exemplary communication procedures using the present invention. These will now be described with further reference to Fig. 2. It should be noted that some or all

20

messages to and from the data control server 114 may in practice be transmitted over a service portal or the like of the mobile network 104, such as the gateway 106 in Fig. 1.

In Fig. 3, a mobile terminal 100 accesses a  
5 service application 108A1 for the first time. In a first step 300, the terminal 100 sends a service request SR to the mobile network which is forwarded to the data control server 114 and received in the mobile network interface 200 residing therein. The logic unit 204 identifies the mobile  
10 user and the application 108A1 corresponding to the received service request. It is then recognised by the translator 208 that no AUID exists for this particular user/application combination, by checking the translation table 212. The AUID code generator 206 is then ordered to generate a new AUID  
15 code, which is assigned to this user/application combination and stored in the translation table 212.

Next in a step 302, the service request is sent with the AUID code to the application 108A1. The application 108A1 then determines in this case that specific user data  
20 is needed to provide the requested service, and therefore sends a user data request UDR and the AUID code to the data control server 114 in a step 304, which are received in the external provider interface 202 of the server 114. It is then checked in the permission table 210 whether the  
25 application 108A1 is allowed to receive the requested user data. If so, the requested user data is retrieved from the user database 112 and the user data UD is sent to the application 108A1 in a step 306. If the application 108A1 is not allowed to receive the requested user data, or if the  
30 application 108A1 is not registered at all, an appropriate error message E may be sent in an alternative step 308, or no response is sent at all. Finally, if the application

108A1 has received the user data, it can execute the requested service as indicated in a step 310, e.g. by sending payload data to the mobile terminal 100.

In Fig. 4, a mobile terminal 100 accesses the service application 108A1 again at a later occasion by sending a new service request SR in a first step 400, which is received in the data control server 114. The logic unit 204 then identifies the mobile user and the application 108A1 as in the example above, and the previously assigned AUID code is retrieved from the translation table 212 by the translator 208. In a next step 402, the service request SR and the AUID code are sent to the application 108A1. It is then possible for the application 108A1 to attribute the previously received user data to the service, if it has been locally stored. If no further user data is needed, the application 108A1 can execute the requested service as indicated in a step 404. If more data is needed, such as a current location or a prepaid account status, the steps 304-310 in Fig. 3 may be executed again, as described above.

The processes of retrieving needed user data and delivering a requested service are thereby simplified and can be controlled by the mobile network for ensuring user privacy.

Fig. 5 is a flow chart illustrating the procedure executed in the data control server 114 when a user data request is received from a service application of an external provider. The user data request is received together with an AUID code in a first step 500, corresponding to step 304 in Fig. 3. An authentication routine may optionally be performed in connection with step 500. Next in a step 502, it is determined whether the application is allowed to retrieve the requested user data,

by checking the permission table 210. If not, an error message is sent to the application in a step 504, or alternatively, no response is given at all. If the request is granted, the received AUID code is translated into a mobile user identity in a step 506, by checking the translation table 212.

Next, it is determined in a step 508 whether a valid mobile user identity was found in step 506 in order to check if the application is authorised. This check provides additional security since only an authorised application can know a valid AUID code. If not found, an error message is sent to the application in a step 510. Otherwise, the requested user data is retrieved from the user database 112 and is sent to the application in a final step 512.

By using the described invention, a simple and reliable procedure is obtained for exchanging user data to service applications of external providers, enabling efficient control and communication between a mobile network and the applications. Access to user data is controlled by a single component, the data control server 114, which thus may act as a firewall. Hence, sensitive user information can be protected from unauthorised access.

By using the unique AUID codes in service requests according to the present invention, an unauthorised application cannot impersonate an authorised application to fraudulently obtain user data. Also, users are automatically authenticated towards the applications by the AUID codes and no exchange of usernames and passwords is necessary between users and applications. Therefore, applications designed to be accessed over the Internet can easily be adapted for access via a data control server 114 as described above.



While service applications are forced to direct user data requests to a data control server 114 for initial control, the mobile network can still be used as a "pipeline" for communicating application data when delivering the service, without further involving the data control server 114.

In practice, the invention is preferably implemented as software in the data control server 114 for executing the described processes. It should be noted that the functional units 200-212 in Fig. 2 are merely logically represented and may be implemented as software in one or more processors or the like anywhere in the server 114. In an alternative embodiment, the logic unit 204 may for example be integrated with the interfaces 200, 202. In another embodiment, the logic unit 204, the AUID code generator 206 and the translator 208 may be integrated into a single functional unit. Furthermore, the permission table 210 and the translation table 212 may be stored in a memory within or outside the data control server 114.

While the invention has been described with reference to specific exemplary embodiments, the description is only intended to illustrate the inventive concept and should not be taken as limiting the scope of the invention. Various alternatives, modifications and equivalents may be used without departing from the spirit of the invention, which is defined by the appended claims.

## CLAIMS

1. A method of exchanging user-specific data from a mobile network to a service application of an external service provider, wherein certain user data is needed by the application for providing a requested service to a mobile user, **characterised by the following steps:**
  - A) generating a unique Application User Identification (AUID) code which is assigned to a combination of the mobile user and the application,
  - B) sending the assigned AUID code to the application,
  - C) receiving from the application a request for the needed user data together with an AUID code,
  - D) determining whether the application is allowed to retrieve the requested user data, and if so
  - E) retrieving the requested user data based on the received AUID code and sending the user data to the application.
2. A method according to claim 1, **characterised in** that the AUID code is generated in step A) in response to receiving a service request from a mobile user.
3. A method according to claim 1 or 2, **characterised in** that the AUID code is stored in a translation table together with a mobile user identity and an application identity.
4. A method according to claim 3, **characterised in** that the mobile user identity is obtained from the translation table based on the AUID code received in step C), for retrieving the requested user data in step E) from a user

data base in which user-specific data is stored for mobile users being registered in the mobile network.

- 5 5. A method according to any of claims 1 - 4, **characterised in** that the AUID code is used by the application for attributing the user data sent in step E), to the service upon subsequent access of the mobile user to the same service.
- 10 6. A method according to any of claims 1 - 5, **characterised in** that the determining step D) is performed by checking a permission table specifying the types of user data that each service application is allowed to receive from the mobile network.
- 15 7. A method according to claim 6, **characterised in** that a permission table is maintained for a specific user or group of users.
- 20 8. A method according to claim 6 or 7, **characterised in** that an error message is sent if it is determined in step D) that the application is not allowed to retrieve the requested user data.
- 25 9. A method according to any of claims 1 - 8, **characterised in** that new AUID codes are generated by dividing the decimal representation of a non-periodic irrational number into blocks of a certain length, wherein each block is used as an AUID code.
- 30 10. A method according to any of claims 1 - 9, **characterised by** the step of determining whether a valid mobile user

identity exists that corresponds to the AUID code received in step C) in order to check if the application is authorised.

- 5 11. A data control server for exchanging user-specific data from a mobile network to a service application of an external service provider, wherein certain user data is needed by the application for providing a requested service to a mobile user, **characterised by:**
- 10 - means for generating a unique Application User Identification (AUID) code which is assigned to a combination of the mobile user and the application,
- means for sending the assigned AUID code to the application,
- 15 - means for receiving from the application a request for the needed user data together with an AUID code,
- means for determining whether the application is allowed to retrieve the requested user data, and
- means for retrieving the requested user data based on a received AUID code and sending the user data to the
- 20 application.
12. A server according to claim 11, **characterised by a** permission table specifying the types of user data that
- 25 each service application is allowed to receive from the mobile network.
13. A server according to claim 11 or 12, **characterised by a** translation table for storing the AUID code together with
- 30 a mobile user identity and an application identity.

14.A server according to claim 13, characterised by a translator for translating AUID codes into mobile user identities and vice versa by checking the translation table.

5

15.A server according to any of claims 11 - 14, characterised in that the code generating means is capable of generating new AUID codes by dividing the decimal representation of a non-periodic irrational number into blocks of a certain length, wherein each

10

block is used as an AUID code.

16.A server according to any of claims 11 - 15, characterised by a mobile network interface for receiving service requests from mobile users, and for retrieving user data.

15

17.A server according to any of claims 11 - 16, characterised by an external provider interface for receiving requests for user data from service applications, and for responding with either the requested data or an appropriate error message.

20

18.A computer program comprising a software code being adapted to perform the method of any of claims 1 - 10 in a data control server.

25


1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30

## ABSTRACT

A method and apparatus for exchanging user-specific data from a mobile network (104) to a service application (108A1) needing certain user data for providing  
5 a requested service to a mobile user (100). A unique Application User Identification (AUID) code is generated and assigned to a combination of the mobile user and the application. The assigned AUID code is then sent to the application. A request for the needed user data is received  
10 from the application together with an AUID code. It is then determined whether the application is allowed to retrieve the requested user data. If so, the requested user data is retrieved based on the received AUID code, and is sent to the application. The procedure may be implemented in a  
15 single data control server (114), enabling efficient control and communication of user data between a mobile network and service applications.

(Fig. 1)

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
841  
842  
843  
844  
845  
846  
847  
848  
849  
850  
851  
852  
853  
854  
855  
856  
857  
858  
859  
860  
861  
862  
863  
864  
865  
866  
867  
868  
869  
870  
871  
872  
873  
874  
875  
876  
877  
878  
879  
880  
881  
882  
883  
884  
885  
886  
887  
888  
889  
890  
891  
892  
893  
894  
895  
896  
897  
898  
899  
900  
901  
902  
903  
904  
905  
906  
907  
908  
909  
910  
911  
912  
913  
914  
915  
916  
917  
918  
919  
920  
921  
922  
923  
924  
925  
926  
927  
928  
929  
930  
931  
932  
933  
934  
935  
936  
937  
938  
939  
940  
941  
942  
943  
944  
945  
946  
947  
948  
949  
950  
951  
952  
953  
954  
955  
956  
957  
958  
959  
960  
961  
962  
963  
964  
965  
966  
967  
968  
969  
970  
971  
972  
973  
974  
975  
976  
977  
978  
979  
980  
981  
982  
983  
984  
985  
986  
987  
988  
989  
990  
991  
992  
993  
994  
995  
996  
997  
998  
999  
1000  
1001  
1002  
1003  
1004  
1005  
1006  
1007  
1008  
1009  
1010  
1011  
1012  
1013  
1014  
1015  
1016  
1017  
1018  
1019  
1020  
1021  
1022  
1023  
1024  
1025  
1026  
1027  
1028  
1029  
1030  
1031  
1032  
1033  
1034  
1035  
1036  
1037  
1038  
1039  
1040  
1041  
1042  
1043  
1044  
1045  
1046  
1047  
1048  
1049  
1050  
1051  
1052  
1053  
1054  
1055  
1056  
1057  
1058  
1059  
1060  
1061  
1062  
1063  
1064  
1065  
1066  
1067  
1068  
1069  
1070  
1071  
1072  
1073  
1074  
1075  
1076  
1077  
1078  
1079  
1080  
1081  
1082  
1083  
1084  
1085  
1086  
1087  
1088  
1089  
1090  
1091  
1092  
1093  
1094  
1095  
1096  
1097  
1098  
1099  
1100  
1101  
1102  
1103  
1104  
1105  
1106  
1107  
1108  
1109  
1110  
1111  
1112  
1113  
1114  
1115  
1116  
1117  
1118  
1119  
1120  
1121  
1122  
1123  
1124  
1125  
1126  
1127  
1128  
1129  
1130  
1131  
1132  
1133  
1134  
1135  
1136  
1137  
1138  
1139  
1140  
1141  
1142  
1143  
1144  
1145  
1146  
1147  
1148  
1149  
1150  
1151  
1152  
1153  
1154  
1155  
1156  
1157  
1158  
1159  
1160  
1161  
1162  
1163  
1164  
1165  
1166  
1167  
1168  
1169  
1170  
1171  
1172  
1173  
1174  
1175  
1176  
1177  
1178  
1179  
1180  
1181  
1182  
1183  
1184  
1185  
1186  
1187  
1188  
1189  
1190  
1191  
1192  
1193  
1194  
1195  
1196  
1197  
1198  
1199  
1200  
1201  
1202  
1203  
1204  
1205  
1206  
1207  
1208  
1209  
1210  
1211  
1212  
1213  
1214  
1215  
1216  
1217  
1218  
1219  
1220  
1221  
1222  
1223  
1224  
1225  
1226  
1227  
1228  
1229  
1230  
1231  
1232  
1233  
1234  
1235  
1236  
1237  
1238  
1239  
1240  
1241  
1242  
1243  
1244  
1245  
1246  
1247  
1248  
1249  
1250  
1251  
1252  
1253  
1254  
1255  
1256  
1257  
1258  
1259  
1260  
1261  
1262  
1263  
1264  
1265  
1266  
1267  
1268  
1269  
1270  
1271  
1272  
1273  
1274  
1275  
1276  
1277  
1278  
1279  
1280  
1281  
1282  
1283  
1284  
1285  
1286  
1287  
1288  
1289  
1290  
1291  
1292  
1293  
1294  
1295  
1296  
1297  
1298  
1299  
1300  
1301  
1302  
1303  
1304  
1305  
1306  
1307  
1308  
1309  
1310  
1311  
1312  
1313  
1314  
1315  
1316  
1317  
1318  
1319  
1320  
1321  
1322  
1323  
1324  
1325  
1326  
1327  
1328  
1329  
1330  
1331  
1332  
1333  
1334  
1335  
1336  
1337  
1338  
1339  
1340  
1341  
1342  
1343  
1344  
1345  
1346  
1347  
1348  
1349  
1350  
1351  
1352  
1353  
1354  
1355  
1356  
1357  
1358  
1359  
1360  
1361  
1362  
1363  
1364  
1365  
1366  
1367  
1368  
1369  
1370  
1371  
1372  
1373  
1374  
1375  
1376  
1377  
1378  
1379  
1380  
1381  
1382  
1383  
1384  
1385  
1386  
1387  
1388  
1389  
1390  
1391  
1392  
1393  
1394  
1395  
1396  
1397  
1398  
1399  
1400  
1401  
1402  
1403  
1404  
1405  
1406  
1407  
1408  
1409  
1410  
1411  
1412  
1413  
1414  
1415  
1416  
1417  
1418  
1419  
1420  
1421  
1422  
1423  
1424  
1425  
1426  
1427  
1428  
1429  
1430  
1431  
1432  
1433  
1434  
1435  
1436  
1437  
1438  
1439  
1440  
1441  
1442  
1443  
1444  
1445  
1446  
1447  
1448  
1449  
1450  
1451  
1452  
1453  
1454  
1455  
1456  
1457  
1458  
1459  
1460  
1461  
1462  
1463  
1464  
1465  
1466  
1467  
1468  
1469  
1470  
1471  
1472  
1473  
1474  
1475  
1476  
1477  
1478  
1479  
1480  
1481  
1482  
1483  
1484  
1485  
1486  
1487  
1488  
1489  
1490  
1491  
1492  
1493  
1494  
1495  
1496  
1497  
1498  
1499  
1500  
1501  
1502  
1503  
1504  
1505  
1506  
1507  
1508  
1509  
1510  
1511  
1512  
1513  
1514  
1515  
1516  
1517  
1518  
1519  
1520  
1521  
1522  
1523  
1524  
1525  
1526  
1527  
1528  
1529  
1530  
1531  
1532  
1533  
1534  
1535  
1536  
1537  
1538  
1539  
1540  
1541  
1542  
1543  
1544  
1545  
1546  
1547  
1548  
1549  
1550  
1551  
1552  
1553  
1554  
1555  
1556  
1557  
1558  
1559  
1560  
1561  
1562  
1563  
1564  
1565  
1566  
1567  
1568  
1569  
1570  
1571  
1572  
1573  
1574  
1575  
1576  
1577  
1578  
1579  
1580  
1581  
1582  
1583  
1584  
1585  
1586  
1587  
1588  
1589  
1590  
1591  
1592  
1593  
1594  
1595  
1596  
1597  
1598  
1599  
1600  
1601  
1602  
1603  
1604  
1605  
1606  
1607  
1608  
1609  
1610  
1611  
1612  
1613  
1614  
1615  
1616  
1617  
1618  
1619  
1620  
1621  
1622  
1623  
1624  
1625  
1626  
1627  
1628  
1629  
1630  
1631  
1632  
1633  
1634  
1635  
1636  
1637  
1638  
1639  
1640  
1641  
1642  
1643  
1644  
1645  
1646  
1647  
1648  
1649  
1650  
1651  
1652  
1653  
1654  
1655  
1656  
1657  
1658  
1659  
1660  
1661  
1662  
1663  
1664  
1665  
1666  
1667  
1668  
1669  
1670  
1671  
1672  
1673  
1674  
1675  
1676  
1677  
1678  
1679  
1680  
1681  
1682  
1683  
1684  
1685  
1686  
1687  
1688  
1689  
1690  
1691  
1692  
1693  
1694  
1695  
1696  
1697  
1698  
1699  
1700  
1701  
1702  
1703  
1704  
1705  
1706  
1707  
1708  
1709  
1710  
1711  
1712  
1713  
1714  
1715  
1716  
1717  
1718  
1719  
1720  
1721  
1722  
1723  
1724  
1725  
1726  
1727  
1728  
1729  
1730  
1731  
1732  
1733  
1734  
1735  
1736  
1737  
1738  
1739  
1740  
1741  
1742  
1743  
1744  
1745  
1746  
1747  
1748  
1749  
1750  
1751  
1752  
1753  
1754  
1755  
1756  
1757  
1758  
1759  
1760  
1761  
1762  
1763  
1764  
1765  
1766  
1767  
1768  
1769  
1770  
1771  
1772  
1773  
1774  
1775  
1776  
1777  
1778  
1779  
1780  
1781  
1782  
1783  
1784  
1785  
1786  
1787  
1788  
1789  
1790  
1791  
1792  
1793  
1794  
1795  
1796  
1797  
1798  
1799  
1800  
1801  
1802  
1803  
1804  
1805  
1806  
1807  
1808  
1809  
1810  
1811  
1812  
1813  
1814  
1815  
1816  
1817  
1818  
1819  
1820  
1821  
1822  
1823  
1824  
1825  
1826  
1827  
1828  
1829  
1830  
1831  
1832  
1833  
1834  
1835  
1836  
1837  
1838  
1839  
1840  
1841  
1842  
1843  
1844  
1845  
1846  
1847  
1848  
1849  
1850  
1851  
1852  
1853  
1854  
1855  
1856  
1857  
1858  
1859  
1860  
1861  
1862  
1863  
1864  
1865  
1866  
1867  
1868  
1869  
1870  
1871  
1872  
1873  
1874  
1875  
1876  
1877  
1878  
1879  
1880  
1881  
1882  
1883  
1884  
1885  
1886  
1887  
1888  
1889  
1890  
1891  
1892  
1893  
1894  
1895  
1896  
1897  
1898  
1899  
1900  
1901  
1902  
1903  
1904  
1905  
1906  
1907  
1908  
1909  
1910  
1911  
1912  
1913  
1914  
1915  
1916  
1917  
1918  
1919  
1920  
1921  
1922  
1923  
1924  
1925  
1926  
1927  
1928  
1929  
1930  
1931  
1932  
1933  
1934  
1935  
1936  
1937  
1938  
1939  
1940  
1941  
1942  
1943  
1944  
1945  
1946  
1947  
1948  
1949  
1950  
1951  
1952  
1953  
1954  
1955  
1956  
1957  
1958  
1959  
1960  
1961  
1962  
1963  
1964  
1965  
1966  
1967  
1968  
1969  
1970  
1971  
1972  
1973  
1974  
1975  
1976  
1977  
1978  
1979  
1980  
1981  
1982  
1983  
1984  
1985  
1986  
1987  
1988  
1989  
1990  
1991  
1992  
1993  
1994  
1995  
1996  
1997  
1998  
1999  
2000  
2001  
2002  
2003  
2004  
2005  
2006  
2007  
2008  
2009  
2010  
2011  
2012  
2013  
2014  
2015  
2016  
2017  
2018  
2019  
2020  
2021  
2022  
2023  
2024  
2025  
2026  
2027  
2028  
2029  
2030  
2031  
2032  
2033  
2034  
2035  
2036  
2037  
2038  
2039  
2040  
2041  
2042  
2043  
2044  
2045  
2046  
2047  
2048  
2049  
2050  
2051  
2052  
2053  
2054  
2055  
2056  
2057  
2058  
2059  
2060  
2061  
2062  
2063  
2064  
2065  
2066  
2067  
2068  
2069  
2070  
2071  
2072  
2073  
2074  
2075  
2076  
2077  
2078  
2079  
2080  
2081  
2082  
2083  
2084  
2085  
2086  
2087  
2088  
2089  
2090  
2091  
2092  
2093  
2094  
2095  
2096  
2097  
2098  
2099  
2100  
2101  
2102  
2103  
2104  
2105  
2106  
2107  
2108  
2109  
2110  
2111  
2112  
2113  
2114  
2115  
2116  
2117  
2118  
2119  
2120  
2121  
2122  
2123  
2124  
2125  
2126  
2127  
2128  
2129  
2130  
2131  
2132  
2133  
2134  
2135  
2136  
2137  
2138  
2139  
2140  
2141  
2142  
2143  
2144  
2145  
2146  
2147  
2148  
2149  
2150  
2151  
2152  
2153  
2154  
2155  
2156  
2157  
2158  
2159  
2160  
2161  
2162  
2163  
2164  
2165  
2166  
2167  
2168  
2169  
2170  
2171  
2172  
2173  
2174  
2175  
2176  
2177  
2178  
2179  
2180  
2181  
2182  
2183  
2184  
2185  
2



2/3

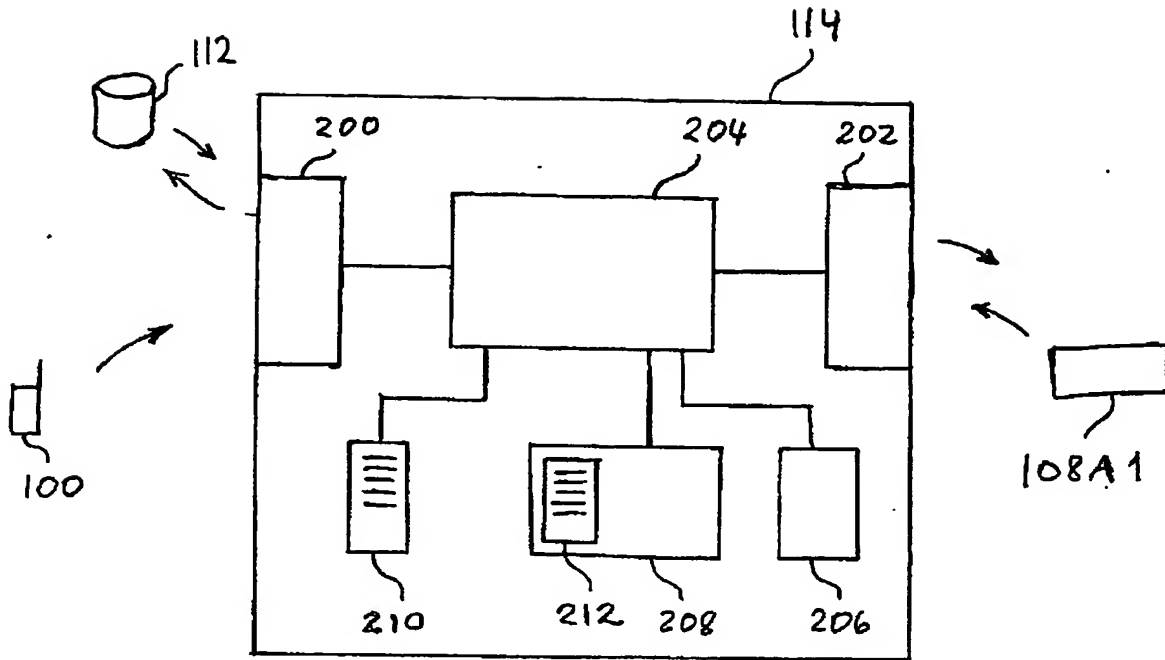


Fig. 2

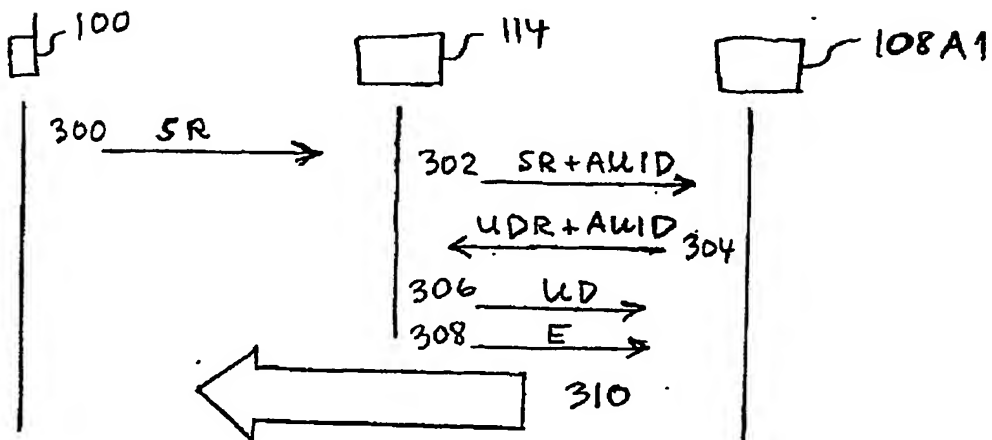


Fig. 3



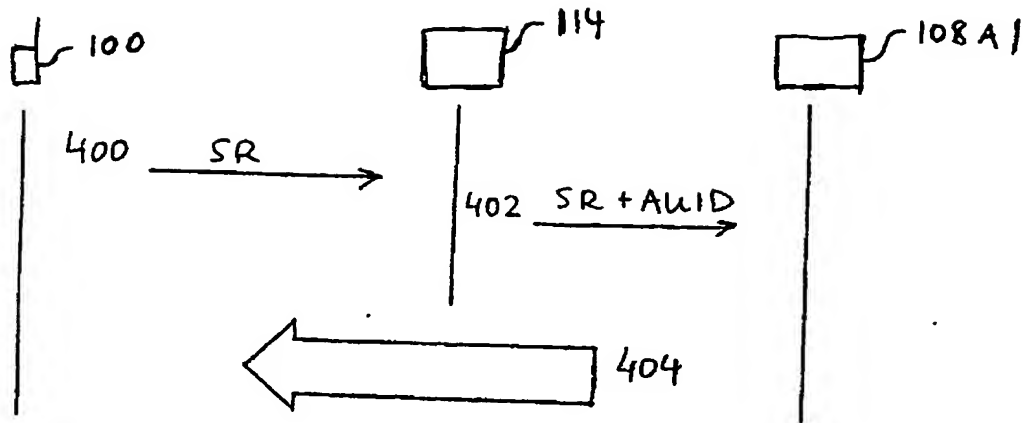


Fig. 4

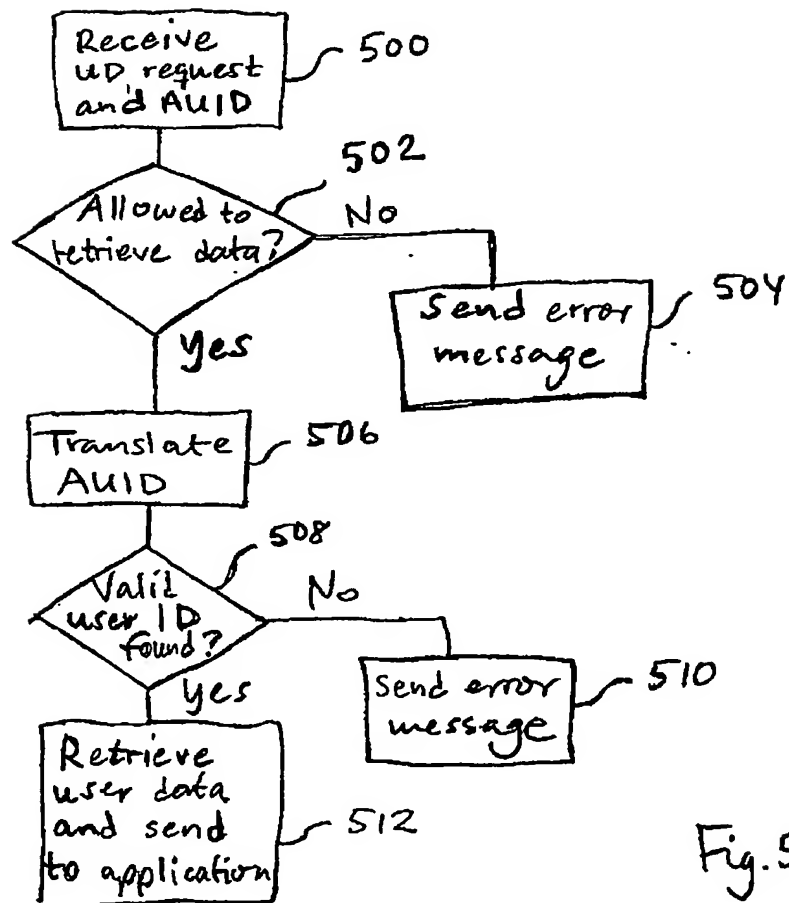


Fig. 5